


© Graham Bantock 2005
 Revised Jan 2009.

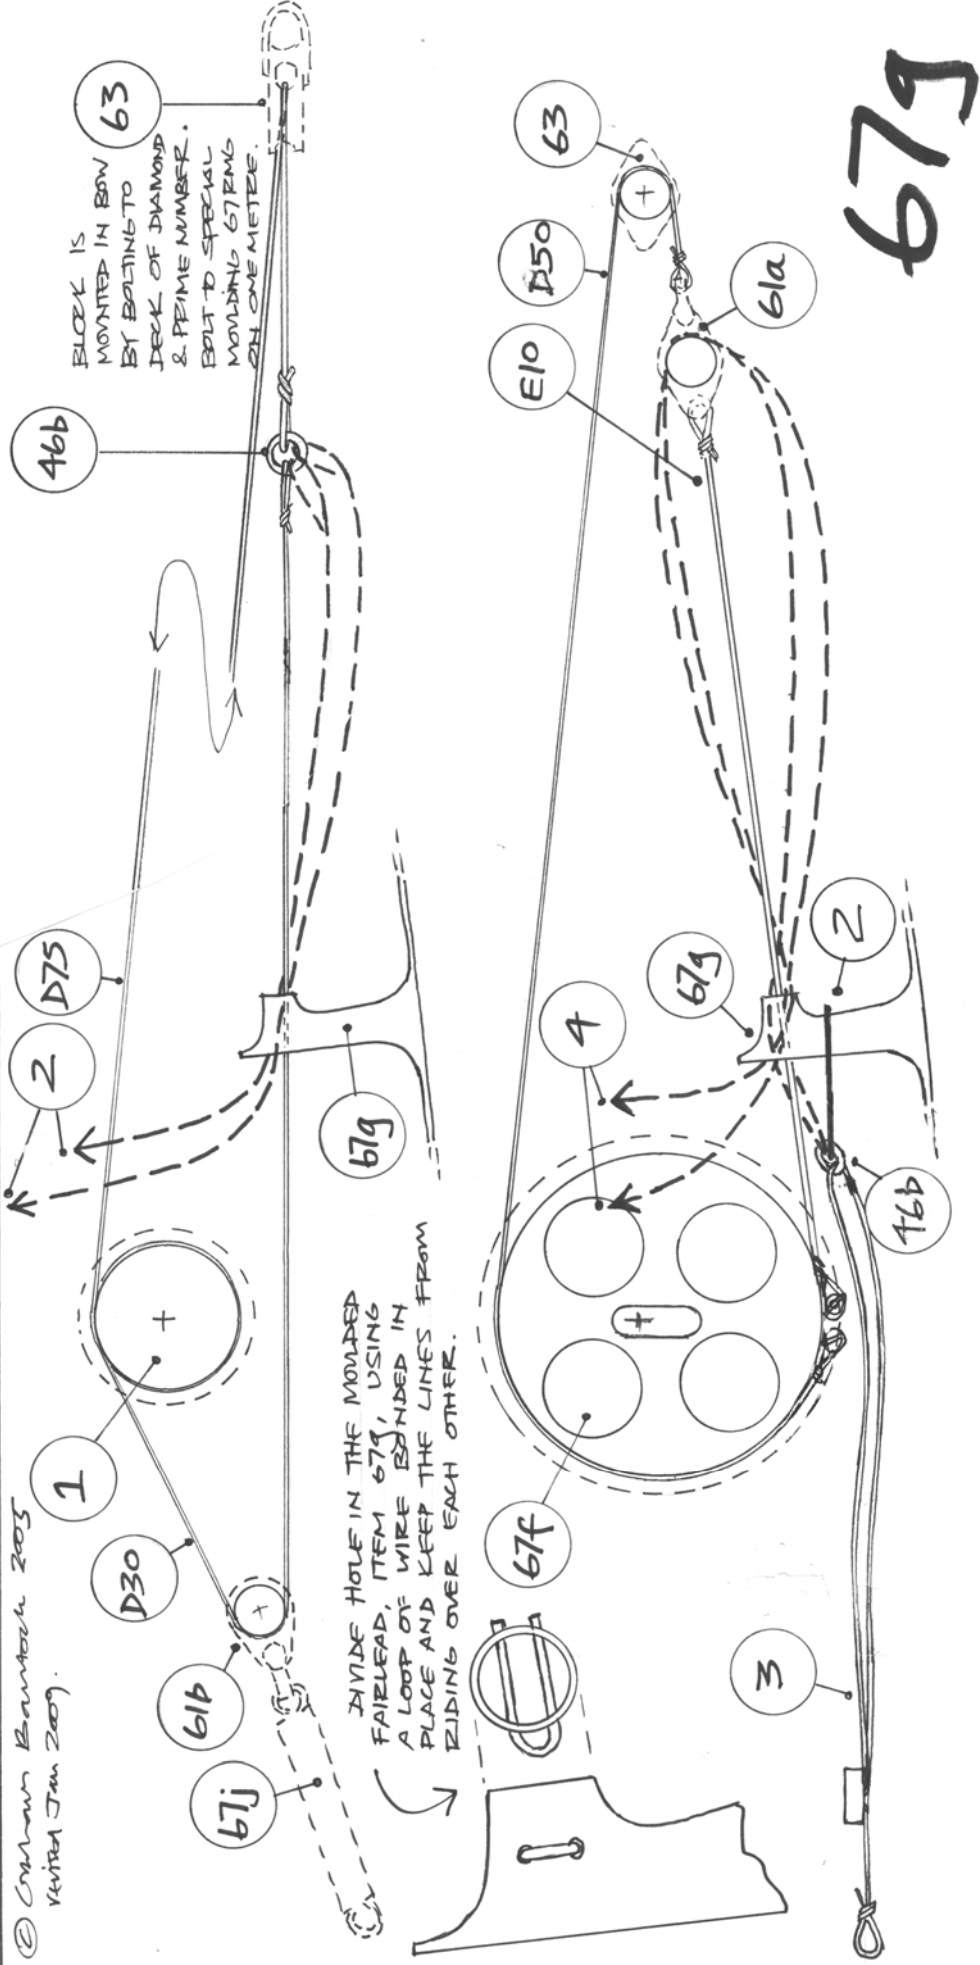

upper diagram

schematic diagram of winch loop used in SAILSetc boats with RMG or Whirlwind winches from December 2005 onwards

- 1 Double drum of winch. The line going forward should be attached to the lower section of the drum. The return line should be attached to the upper section of the drum.
- 2 After passing through the 67g fairlead moulding the sheets each pass through a 52a fairlead and out of the hull.

lower diagram

schematic diagram of winch loop used in SAILSetc boats with Hitec servo sail control

- 1 Spare.
- 2 A loop of elastic pulls the 46b forward.
- 3 Adjustment line – use D75 and 57b attached to solid point in hull.
- 4 After passing through the 67g fairlead moulding the sheets each pass through a 52a fairlead and out of the hull.

67g